

DHI-ARM310-W2

Wireless input expander



System Overview

Wireless input expander is a conversion device that connects to a detector through wired mode, and sends the message in wireless mode to the security system. It can be set up via the DMSS app for iOS and Android phones.

Scene

Mainly applied for villas, shops, apartments, etc.

Technical Specification

Port

| Indicator Light | 1 × green alarm indicator |
|-----------------|-----------------------------|
| Button | 1 × power button |
| Protection Zone | 1-channel dry contact input |

Function

| Tampering Alarm | Yes |
|-------------------|---------------------------|
| Remote Upgrade | Cloud update |
| Low Battery Alarm | Yes |
| Test Mode | Yes |
| Search | Signal strength detection |

Wireless

| Carrier Frequency | 433.1 MHz–434.6 MHz |
|-------------------------|--|
| Communication Distance | Up to 1,000 m (3,280.84 ft) in an open space |
| Communication Mechanism | Two-way |
| Frequency Hopping | Yes |

- Six types of alarm: intrusion, medical, fire, emergency, gas, and tamper.
- NC and NO are available for alarm inputs (NO by default).
- Signal strength detection.
- · Low battery alarm.
- · Temperature monitoring.
- Frequency hopping function and two-way communication technology ensure communication stability.
- Cloud update and automatic recovery from update failure.


| Encryption Mode | AES128 | |
|-----------------------|--|--|
| General | | |
| Power Supply Mode | CR123A battery | |
| Power Consumption | Max. 70 mW | |
| Operating Temperature | $-10~^{\circ}\text{C}$ to +55 $^{\circ}\text{C}$ (+14 $^{\circ}\text{F}$ to +131 $^{\circ}\text{F}$) (indoor) | |
| Operating Humidity | 10%-90% (RH) | |
| Dimensions | 100.2mm × 20.8mm × 20.3mm (3.94" × 0.82" × 0.80") | |
| Package Dimensions | 135.0 mm × 98.5 mm × 27.8mm (5.31" × 3.88" × 1.09") | |
| Installation Mode | Bracket mount | |
| Net Weight | 70 g (0.15 lb) | |
| Gross Weight | 115 g (0.25 lb) | |
| Certification | CE | |
| Battery Life | 4 years (The external input type is NO) 2 years (The external input type is NC or Pulse) | |
| Casing Material | PC + ABS | |

Temperature


| Measurement Range | −15 °C to +65 °C (+5 °F to +149 °F) (indoor) |
|-----------------------|--|
| Measurement Precision | ±1 °C (±1.8 °F) |
| Resolution | 1 °C (33.8 °F) |

| Ordering Information | | | | |
|-------------------------|---------------|--------------------------|--|--|
| Туре | Part Number | Description | | |
| Wireless input expander | DHI-ARM310-W2 | Single input transmitter | | |

Installation

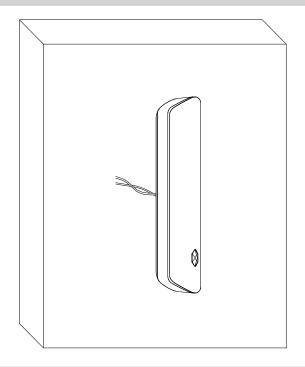


Dimensions (mm[inch])



Application









Alarm Hub

Wireless Input Expander